

Technical Data Sheet

43700




Description

- Rigid epoxy molding compound for targeted low dielectric and low loss applications
- Can be molded net shape to fill complex geometries with minimal to no machining.
- Contact for more details on sizing and to discuss applications.

<u>Properties</u>	<u>Test Method</u>	<u>Value</u>
Density	ASTM C271	0.58 g/cm ³
Tensile Strength	ASTM D638	2300 psi
Elongation	ASTM D638	8%
Surface Resistivity	ASTM D257	>11.2 GΩ/□
Color	--	Gray

Permittivity

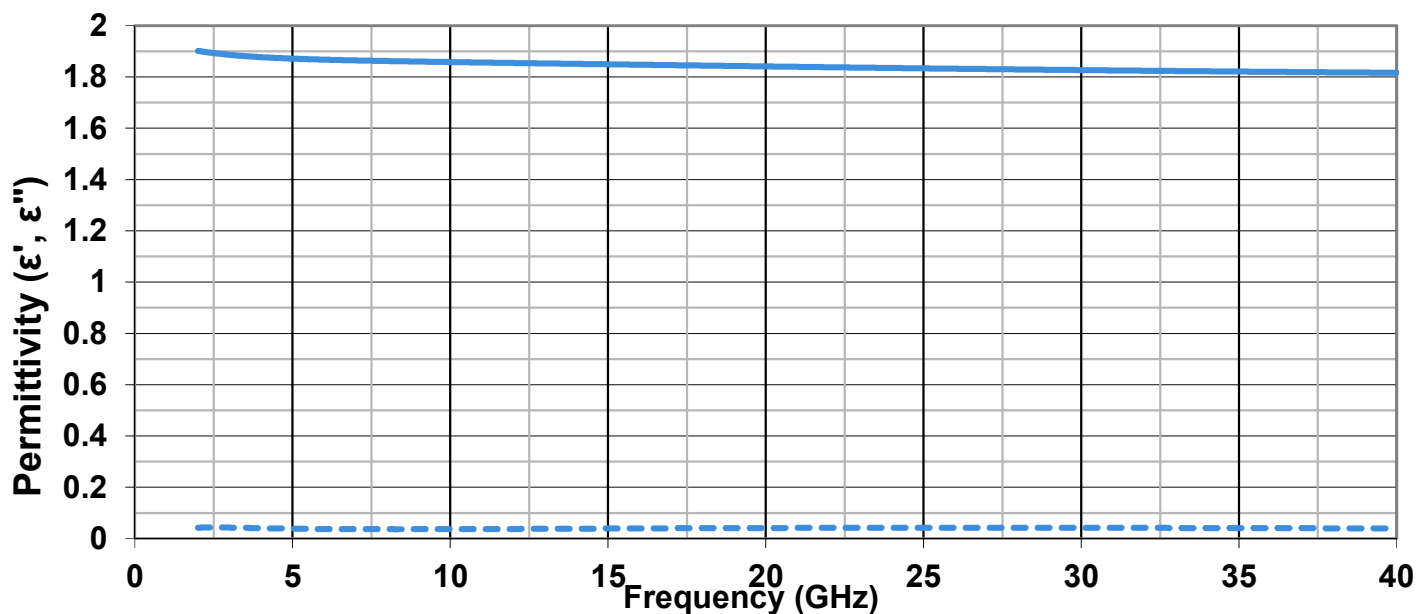

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.