



# HiMax™ CPPC107

[300csm, PP180, 300csm]



## Product Data Sheet

### Fabric Construction

Fibre Type: E-Glass  
Construction: CSM/CORE/CSM  
Fabric Weight: 785 gsm +/- 5%  
Dry Thickness: 4.2

### Ply Construction

#### CSM

Fibre Specification: E-Glass  
Fibre Tex: 2400 tex  
Gauge: 0.5 gg  
Ply Weight: 300 gsm

#### CORE


Fibre Specification: Other  
Fibre Tex: 180 tex  
Gauge: 1 gg  
Ply Weight: 180 gsm

#### CSM

Fibre Specification: E-Glass  
Fibre Tex: 2400 tex  
Gauge: 0.5 gg  
Ply Weight: 300 gsm

### Stitching Fibre

Stitching Thread: Texturised Polyamide  
Stitch DTex: 167  
Stitch Gauge: 3.0 gg  
Stitch Length: 4 mm  
Stitch Type: Tricot  
Stitch Weight: 5 gsm

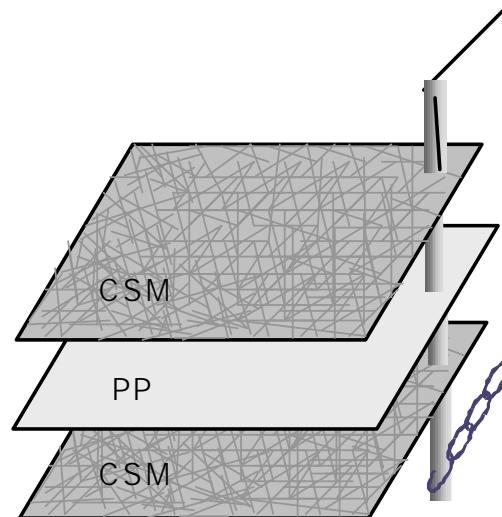

### Customisation

Customer Code and Description:	Customer Specified
Fabric Width:	1270mm (+/- 5mm) - or tapes on application
Tracer Threads / Tapered Edges:	Customer Specified
Approved Fibres:	On Application
Roll Weight / Length:	Customer Specified
Cardboard Core:	Customer Specified
Packaging:	Customer Specified



# HiMax™ CPPC107

[300csm, PP180, 300csm]



## Product Data Sheet

### For more information

Hexcel is a worldwide supplier of composite materials to aerospace and industrial markets.

Our comprehensive range includes:

- HexTow® carbon fibres
- HexForce® reinforcements
- HiMax™ non-crimp fabrics
- HexPly® prepgres
- HexMC® moulding compounds
- HexFlow® RTM resins
- Redux® adhesives
- HexTool® tooling materials
- HexWeb® honeycombs
- Acousti-Cap® sound attenuating honeycomb
- Engineered core
- Engineered products

For quotes, orders and product information call +44 116 275 2200. For other worldwide sales office telephone numbers and a full address list, please go to:

<http://www.hexcel.com/contact/salesoffice>