



HiMax™ CPPC108

[600csm, PP180, 600csm]



Product Data Sheet

Fabric Construction

Fibre Type: E-Glass
Construction: CSM/CORE/CSM
Fabric Weight: 1385 gsm +/- 5%

Ply Construction

CSM

Fibre Specification: E-Glass
Fibre Tex: 2400 tex
Gauge: 0.5 gg
Ply Weight: 600 gsm

CORE


Fibre Specification: Other
Fibre Tex: 180 tex
Gauge: 1 gg
Ply Weight: 180 gsm

CSM

Fibre Specification: E-Glass
Fibre Tex: 2400 tex
Gauge: 0.5 gg
Ply Weight: 600 gsm

Stitching Fibre

Stitching Thread: Texturised Polyamide
Stitch DTex: 167
Stitch Gauge: 3.0 gg
Stitch Length: 4 mm
Stitch Type: Tricot
Stitch Weight: 5 gsm

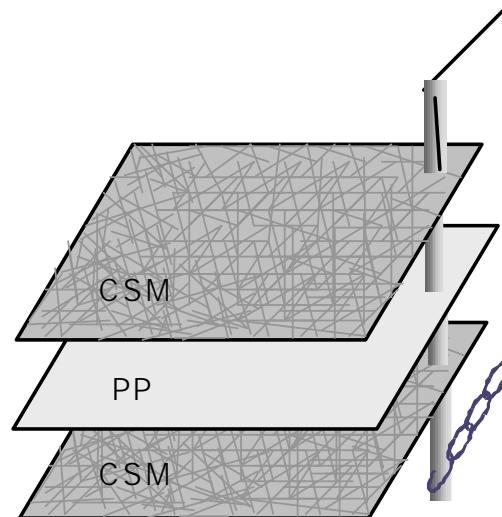

Customisation

Customer Code and Description:	Customer Specified
Fabric Width:	1270mm (+/- 5mm) - or tapes on application
Tracer Threads / Tapered Edges:	Customer Specified
Approved Fibres:	On Application
Roll Weight / Length:	Customer Specified
Cardboard Core:	Customer Specified
Packaging:	Customer Specified



HiMax™ CPPC108

[600csm, PP180, 600csm]



Product Data Sheet

For more information

Hexcel is a worldwide supplier of composite materials to aerospace and industrial markets.

Our comprehensive range includes:

- HexTow® carbon fibres
- HexForce® reinforcements
- HiMax™ non-crimp fabrics
- HexPly® prepgres
- HexMC® moulding compounds
- HexFlow® RTM resins
- Redux® adhesives
- HexTool® tooling materials
- HexWeb® honeycombs
- Acousti-Cap® sound attenuating honeycomb
- Engineered core
- Engineered products

For quotes, orders and product information call +44 116 275 2200. For other worldwide sales office telephone numbers and a full address list, please go to:

<http://www.hexcel.com/contact/salesoffice>