

# Technical Data Sheet

## DP-11186




### Description

- Flexible, loaded silicone based EMI suppression material.
- Tuned for mode suppression in an enclosed cavity, signal isolation, and surface current attenuation.
- Provided in a two-part liquid kit in pint cans.
- Halogen free, RoHS and REACH compliant.

Properties	Test Method	Value
Durometer	ASTM D2240	75 Shore A
Tensile Strength	ASTM D638	349 psi
Elongation	ASTM D638	140%
Surface Resistivity	ASTM D257	> 11 GΩ/□
Viscosity	ASTM D1084	167,000 cP
Pot Life	--	70 - 80 minutes
Color	--	Gray

### Permittivity and Permeability

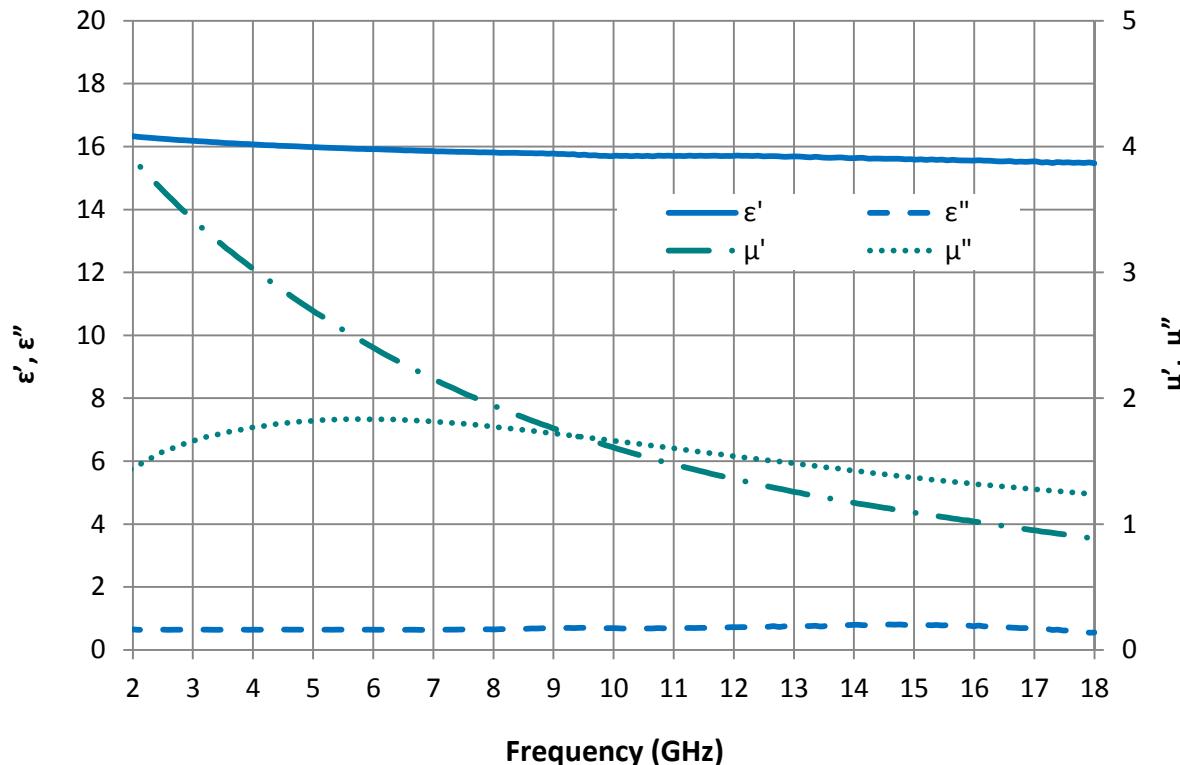

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.