



HiMax™ FAHM150

[GE/AHM, 1900, 0/-60/+60]



Product Data Sheet

Fabric Construction

Fibre Type: E-Glass/Aramid
Construction: 0/-45/+45
Fabric Weight: 1951 gsm +/- 5%

Stitching Fibre

Stitching Thread: Texturised Polyester
Stitch DTex: 78
Stitch Gauge: 6.0 gg
Stitch Length: 3 mm
Stitch Type: 1/2 Pillar Tricot
Stitch Weight: 6 gsm

Ply Construction

0 Ply(Glass)

Fibre Specification: E-Glass
Fibre Tex: 2400 tex
Gauge: 4.5 gg
Ply Weight: 425 gsm

0 Ply(Aramid)

Fibre Specification: Aramid
Fibre Tex: 805 tex
Gauge: 7.5 gg
Ply Weight: 238 gsm

-60 Ply(Glass)

Fibre Specification: E-Glass
Fibre Tex: 600 tex
Gauge: 15 gg
Ply Weight: 409 gsm

-60 Ply(Aramid)


Fibre Specification: Aramid
Fibre Tex: 340 tex
Gauge: 15 gg
Ply Weight: 232 gsm

+60 Ply(Glass)

Fibre Specification: E-Glass
Fibre Tex: 600 tex
Gauge: 15 gg
Ply Weight: 409 gsm

+60 Ply(Aramid)

Fibre Specification: Aramid
Fibre Tex: 340 tex
Gauge: 15 gg
Ply Weight: 232 gsm

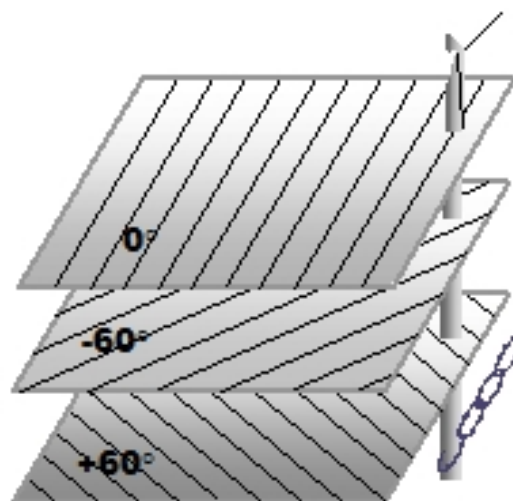



HiMax™ FAHM150

[GE/AHM, 1900, 0/-60/+60]



Product Data Sheet

Customisation

Customer Code and Description:	Customer Specified
Fabric Width:	1270mm (+/- 5mm) - or tapes on application
Tracer Threads / Tapered Edges:	Customer Specified
Approved Fibres:	On Application
Roll Weight / Length:	Customer Specified
Cardboard Core:	Customer Specified
Packaging:	Customer Specified

For more information

Hexcel is a worldwide supplier of composite materials to aerospace and industrial markets. Our comprehensive range includes:

- HexTow® carbon fibres
- HexFlow® RTM resins
- Acousti-Cap® sound attenuating honeycomb
- HexForce® reinforcements
- Redux® adhesives
- Engineered core
- HiMax™ non-crimp fabrics
- HexTool® tooling materials
- Engineered products
- HexPly® prepregs
- HexWeb® honeycombs
- HexMC® moulding compounds

For quotes, orders and product information call +44 116 275 2200. For other worldwide sales office telephone numbers and a full address list, please go to:

<http://www.hexcel.com/contact/salesoffice>