



HiMax[®] CGL6863

FCIM928 [C50k, 800, +45/-45, 0ST]



Product Data Sheet

Fabric Construction

Fibre Type: Carbon
Construction: +45/0ST/-45
Fabric Weight: 800 gsm +/- 5%

Stitching Fibre

Stitching Thread: Polyester White
Stitch DTex: 78
Stitch Gauge: 6.0 gg
Stitch Length: 2.5 mm
Stitch Type: Pillar
Stitch Weight: 7 gsm

Ply Construction

+45° Ply


Fibre Specification: 50k standard modulus carbon
Fibre Tex: 3745 tex
Gauge: 1.93 gg
Ply Weight: 402 gsm

0° STs

Fibre Specification: E-Glass
Fibre Tex: 68 tex
Gauge: 1 gg
Ply Weight: 3 gsm

-45° Ply

Fibre Specification: 50k standard modulus carbon
Fibre Tex: 3745 tex
Gauge: 1.93 gg
Ply Weight: 402 gsm

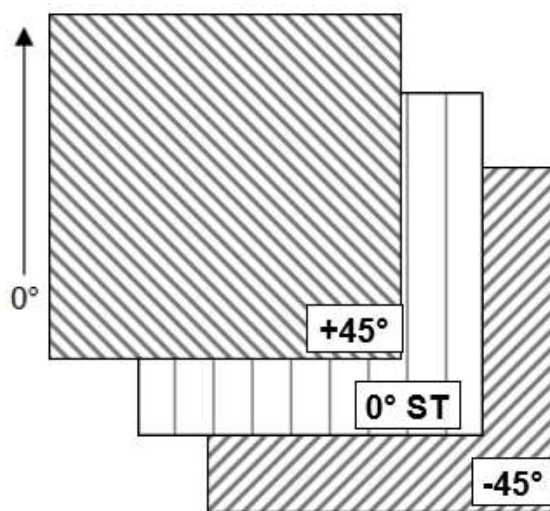

Customisation

Customer Code and Description:	Customer Specified
Fabric Width:	1270mm (+/- 5mm) - or tapes on application
Tracer Threads / Tapered Edges:	Customer Specified
Approved Fibres:	On Application
Roll Weight / Length:	Customer Specified
Cardboard Core:	Customer Specified
Packaging:	Customer Specified



HiMax[®] CGL6863

FCIM928 [C50k, 800, +45/-45, 0ST]



Product Data Sheet

For more information

Hexcel is a worldwide supplier of composite materials to aerospace and industrial markets. Our comprehensive range includes:

- HexTow[®] carbon fibres
- HexFlow[®] RTM resins
- Acousti-Cap[®] sound attenuating honeycomb
- HexForce[®] reinforcements
- Redux[®] adhesives
- Engineered core
- HiMax[®] non-crimp fabrics
- HexTool[®] tooling materials
- Engineered products
- HexPly[®] prepregs
- HexWeb[®] honeycomb
- HexMC[®] moulding compounds

For quotes, orders and product information call +44 116 275 2200. For other worldwide sales office telephone numbers and a full address list, please go to:

<https://www.hexcel.com/contact/>