

# Technical Data Sheet

## LS-10211



### Description


- Flexible, low density, high loss, carbon impregnated foam dielectric absorber.
- Provided with PSA and acrylic coating, LS-10211 may be provided without these upon request.
- Ideal for applications requiring absorption across a wide range of frequencies, including antenna cross-talk and sidelobe reduction and cavity resonance suppression.
- Can be water-jet or die cut for custom configurations, surface coating or ground plane.
- RoHS and REACH compliant.

### Physical Properties

Properties	Value
Sheet Thickness	0.250" $\pm$ 0.062" (6.35 mm $\pm$ 1.6 mm)
Standard Sheet Size	24" x 24" $\pm$ 0.25" (60.96 cm x 60.96 cm, $\pm$ 6.35 mm) Others available upon request.
Color	Black

### Electrical Properties

Frequency	Typical Insertion Loss
10 GHz	- 14 dB ( $\pm$ 2.5)

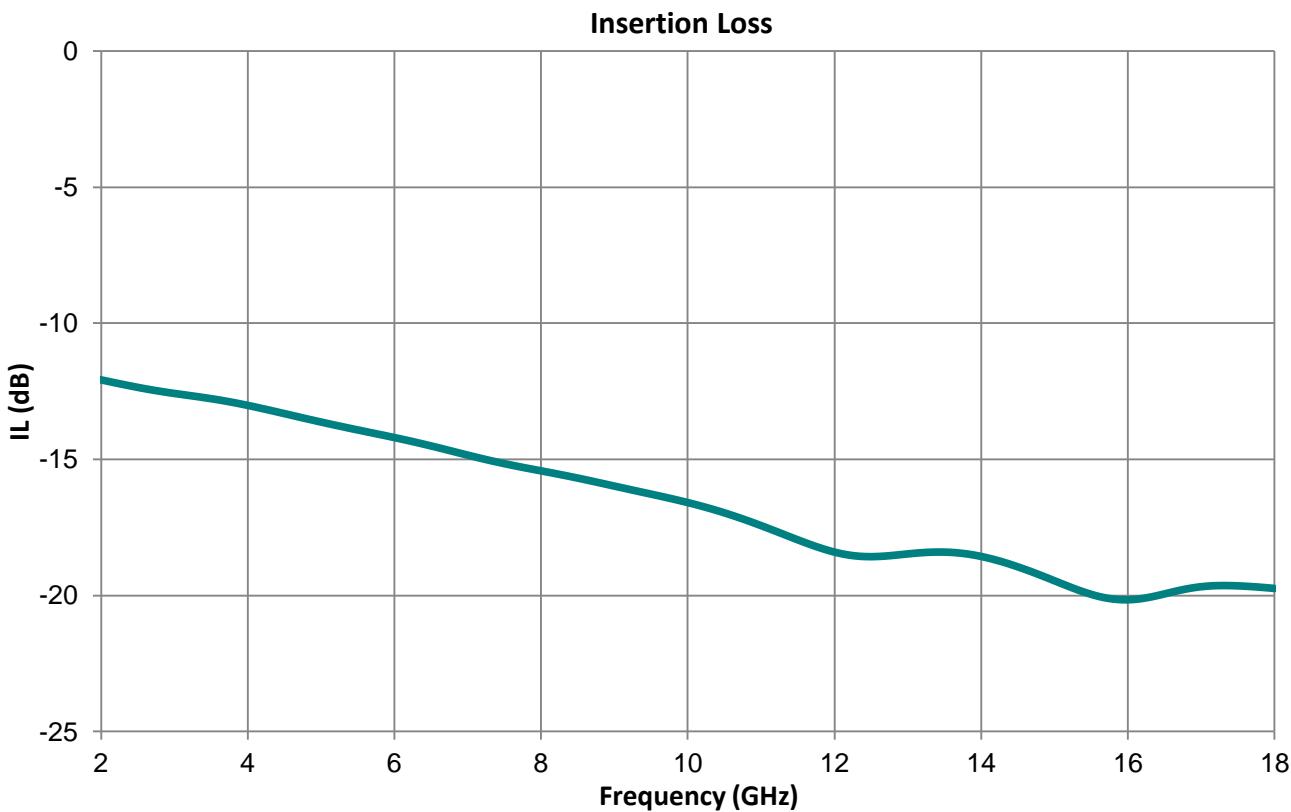

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.