

Technical Data Sheet

PP3000




Description

- Rigid MAGRAM absorber that utilizes a polypropylene binder.
- Designed for surface current attenuation over a wide range of frequencies, particularly below 5 GHz.
- Performance of PP3000 can be tailored to specific applications
- Ideally suited as a nearfield absorber/suppressor in electronic enclosures.
- Custom parts can be injection molded in a wide variety of shapes and sizes.
- Halogen free, RoHS and REACH compliant.

Properties	Test Method	Value
Durometer	ASTM D2240	78 Shore D
Tensile Strength	ASTM D638	2740 psi
Elongation	ASTM D638	2.26%
Surface Resistivity	ASTM D257	823 MΩ/□
Color	--	Black

Permittivity and Permeability

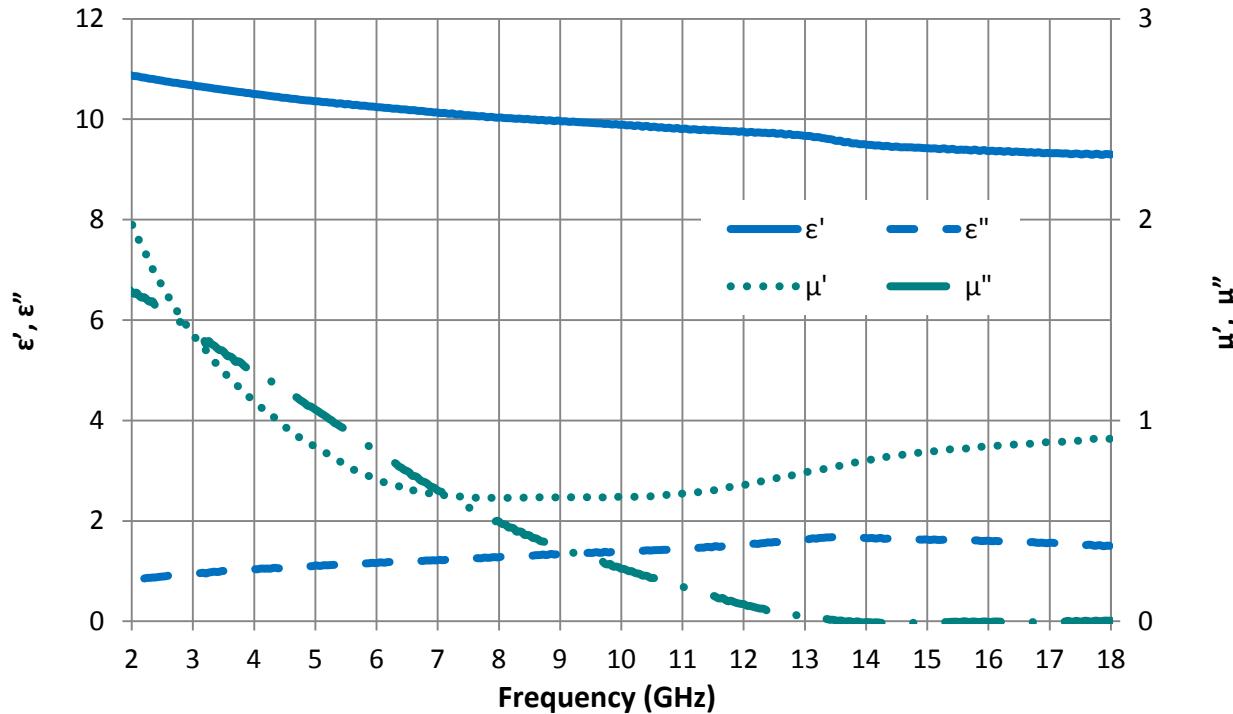

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.