

# Technical Data Sheet

## RT-10363



### Description

- Flexible, low density, high loss, carbon impregnated reticulated foam.
- Available with PSA, surface coating, or ground plane.
- Can be water-jet cut for custom configurations.
- RoHS and REACH compliant.


### Physical Properties

Properties	Value
Sheet Thickness	1.00" (2.54 cm)
Standard Sheet Size	24" x 24" (60.96 x 60.96 cm) Other sheet sizes available upon request.
Color	Black

### Electrical Properties

Frequency	Typical Reflection Loss
3.5-18 GHz	≤ -15.25 dB

### Reflection Loss

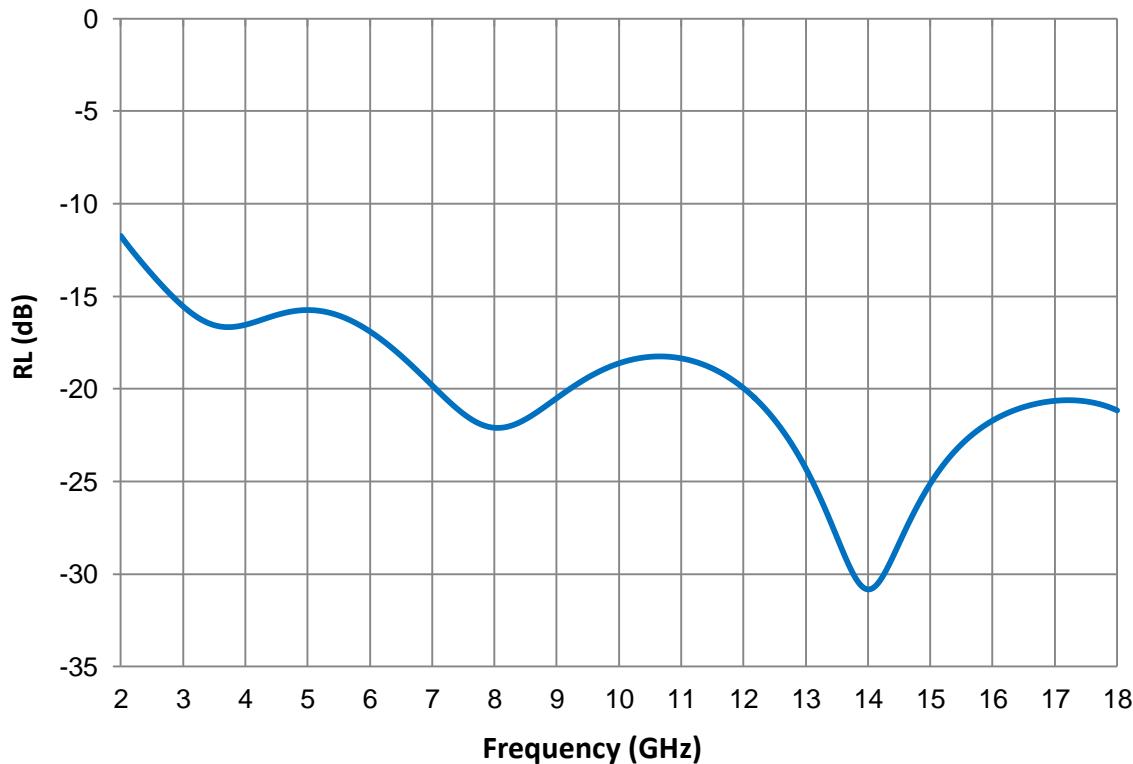

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.