

Technical Data Sheet

RT-11421



Description

- Flexible, low density, high loss, carbon impregnated reticulated foam.
- Available with PSA, surface coating, or ground plane.
- Can be water-jet cut for custom configurations.
- RoHS and REACH compliant.


Physical Properties

| Properties | Value |
|---------------------|--|
| Sheet Thickness | 0.50" (12.7 mm) |
| Standard Sheet Size | 24" x 48" (60.96 cm x 121.92 cm) Others available upon request. |
| Color | Black |


Electrical Properties

| Frequency | Typical Reflection Loss |
|-----------|-------------------------|
| 8-18 GHz | -12 dB |

Insertion Loss

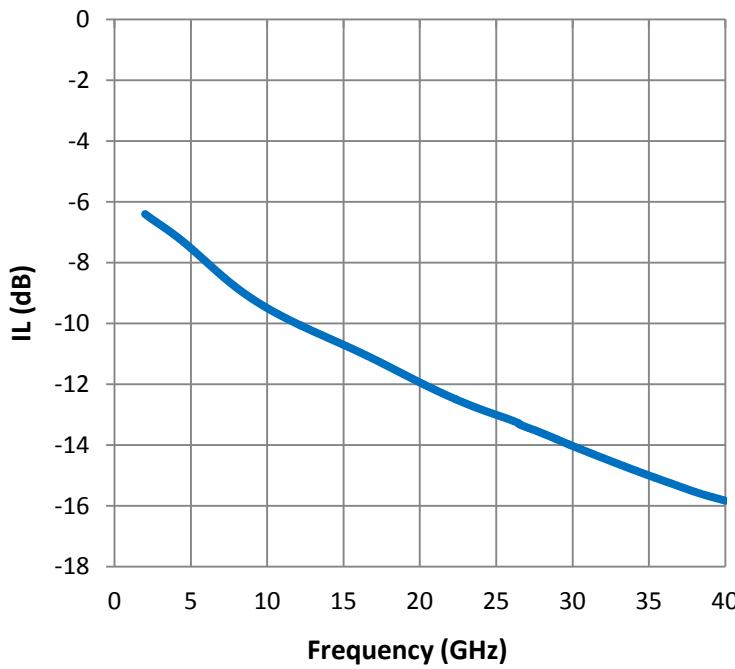

Reflection Loss

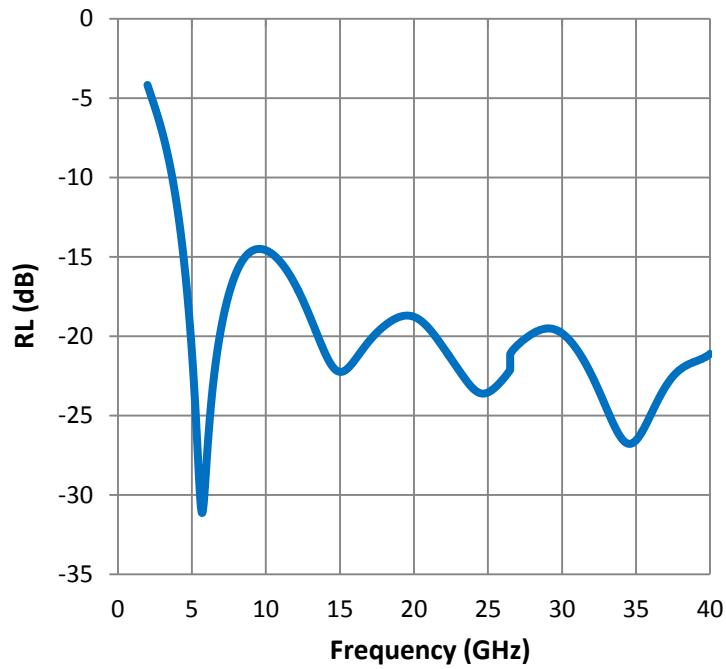

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.