

# Technical Data Sheet

## UD-13316-2




### Description


- Flexible, loaded, urethane, rubber magnetic absorber.
- Tuned for mode suppression in an enclosed cavity, signal isolation, and surface current attenuation.
- Standard sheet size:
  - 24" x 24" (60.96 cm x 60.96 cm).
  - Custom sheet sizes available upon request.
- Available with pressure sensitive adhesive (PSA).
- Can be water-jet or die cut for custom configurations.
- Halogen free, RoHS and REACH compliant.

| Properties                | Test Method | Value                                                          |
|---------------------------|-------------|----------------------------------------------------------------|
| Durometer                 | ASTM D2240  | 27 Shore D                                                     |
| Tensile Strength          | ASTM D638   | 304 psi                                                        |
| Elongation                | ASTM D638   | 244%                                                           |
| Surface Resistivity       | ASTM D257   | > 11 GΩ/□                                                      |
| Max Operating Temperature | --          | 275°F (135°C)                                                  |
| Flammability Rating       | --          | UL94 HB                                                        |
| Standard Sheet Thickness  | --          | 0.055" (1.397 mm)<br>Other thicknesses available upon request. |
| Color                     | --          | Gray                                                           |

### Permittivity and Permeability

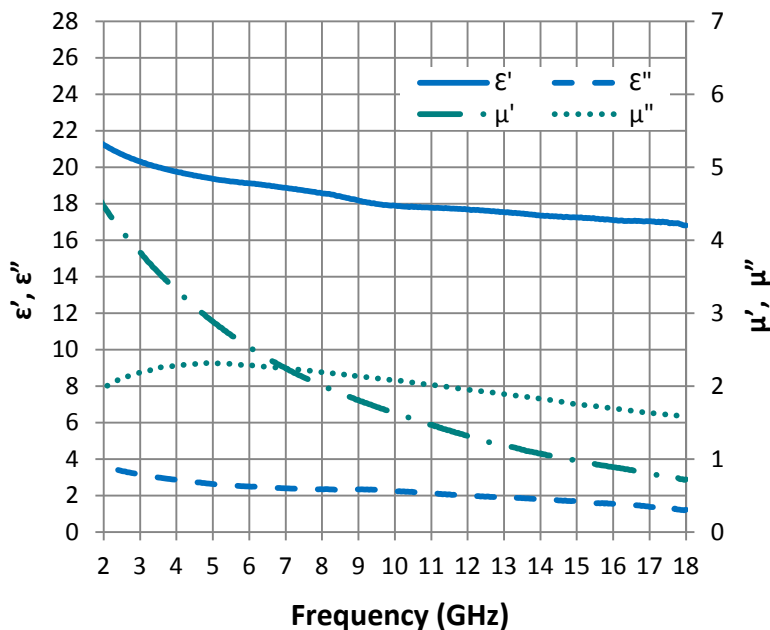

### Reflection Loss

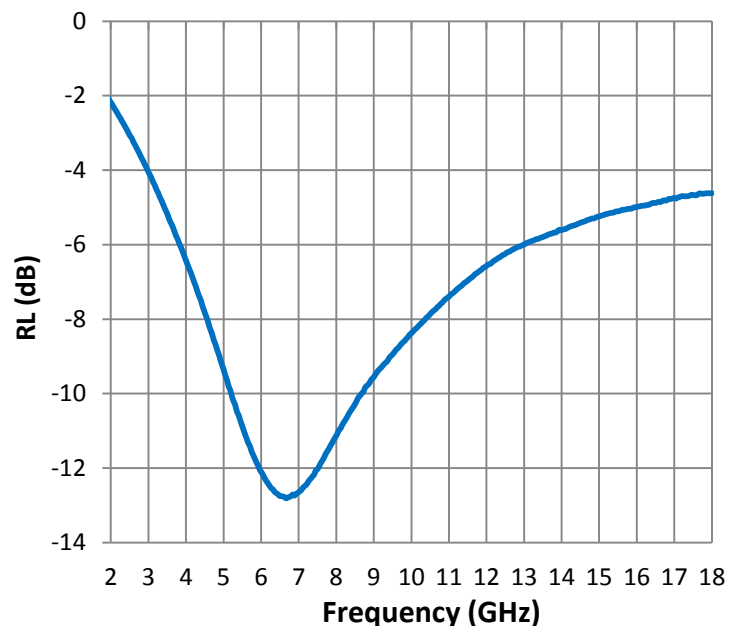

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.