



HiMax® CGL9068

FCIM927 [C50k, 300, 0, MX]



Product Data Sheet

Fabric Construction

Fiber Type: Carbon
Construction: 0
Fabric Weight: 300 gsm +/- 5%

Ply Construction

0° Ply

Fiber Specification: 50k standard modulus carbon
Fiber Tex: 3704 tex
Gauge: 1.9 gg
Ply Weight: 298 gsm

+45° Ply

Fiber Specification: E-Glass
Fiber Tex: 34 tex
Gauge: 2 gg
Ply Weight: 4 gsm

90° Ply


Fiber Specification: E-Glass
Fiber Tex: 34 tex
Gauge: 2 gg
Ply Weight: 3 gsm

-45° Ply

Fiber Specification: E-Glass
Fiber Tex: 34 tex
Gauge: 2 gg
Ply Weight: 4 gsm

Stitching Fiber

Stitching Thread: Polyester White
Stitch DTex: 78
Stitch Gauge: 6.0 gg
Stitch Length: 2.5 mm
Stitch Type: 1/2 Pillar Tricot
Stitch Weight: 7 gsm

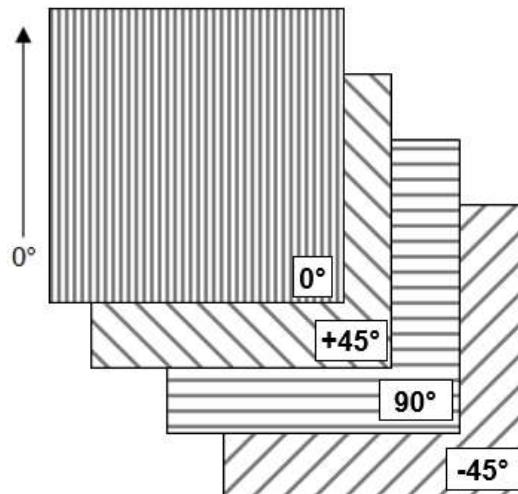

Customization

Customer Code and Description:	Customer Specified
Fabric Width:	1250mm (+/- 5mm) - or tapes on application
Tracer Threads / Tapered Edges:	Customer Specified
Approved Fibers:	On Application
Roll Weight / Length:	Customer Specified
Cardboard Core:	Customer Specified
Packaging:	Customer Specified



HiMax® CGL9068

FCIM927 [C50k, 300, 0, MX]



Product Data Sheet

For more information

Hexcel is a worldwide supplier of composite materials to aerospace and industrial markets. Our comprehensive range includes:

- HexTow® carbon fibres
- HexForce® reinforcements
- HiMax® non-crimp fabrics
- HexPly® prepgs
- HexMC® moulding compounds
- HexFlow® RTM resins
- Redux® adhesives
- HexTool® tooling materials
- HexWeb® honeycomb
- Acousti-Cap® sound attenuating honeycomb
- Engineered core
- Engineered products

For quotes, orders and product information call +44 116 275 2200. For other worldwide sales office telephone numbers and a full address list, please go to:

<https://www.hexcel.com/contact/>